

MT5N

485-505W

N-type HJT Bifacial Dual Glass
Solar Module


Qualidade Garantida

25-Year Warranty for Materials and Processing

30-Year Warranty for Extra Linear Power Output

23.32%

Max. Module Efficiency

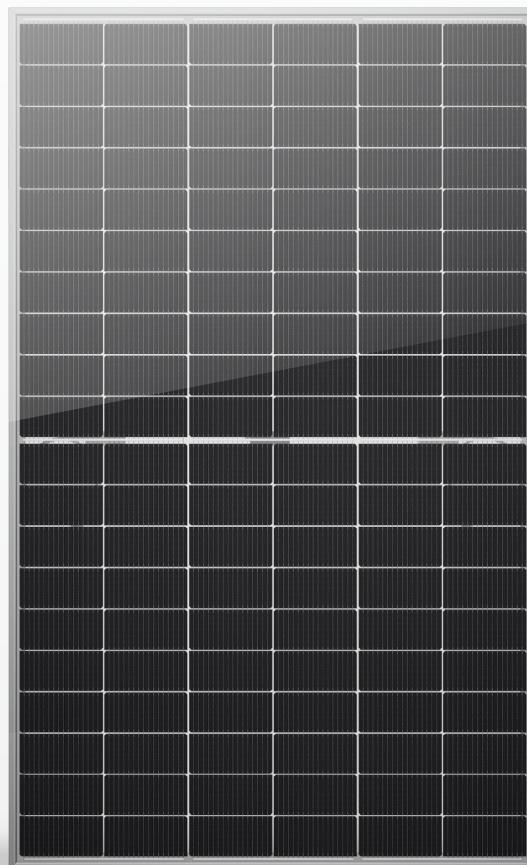

MS-60HB

HJT 2.0 Technology

Combining gettering process and single-side uc-Si technology to ensure higher cell efficiency and higher module power.

-0.26%/°C Pmax temperature coefficient

More stable power generation performance and even better in hot climate.

SMBB design with Half-Cut Technology


Shorter current transmission distance, less resistive loss and higher cell efficiency.

Up to 90% Bifaciality

Natural symmetrical bifacial structure bringing more energy yield from the backside.

Sealing with PIB based sealant

Stronger water resistance, greater air impermeability to extent module lifespan.

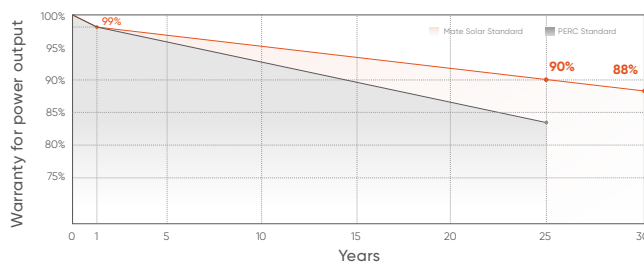

* Please refer to Mate Solar standard warranty for details

Quality Management System And Product Certification

IEC61215/61730, IEC62804(PID), IEC61701(Salt).

IEC62716 (Ammonia), IEC60068-2-68(Sand).

ISO 9001:2015/quality management system.

ISO 14001:2015/environmental management system.


ISO 45001:2018/occupation health safety management system

ISO 50001:2011/energy management system.


IEC TS 62941-2016/PV industry quality management system .



Drawings

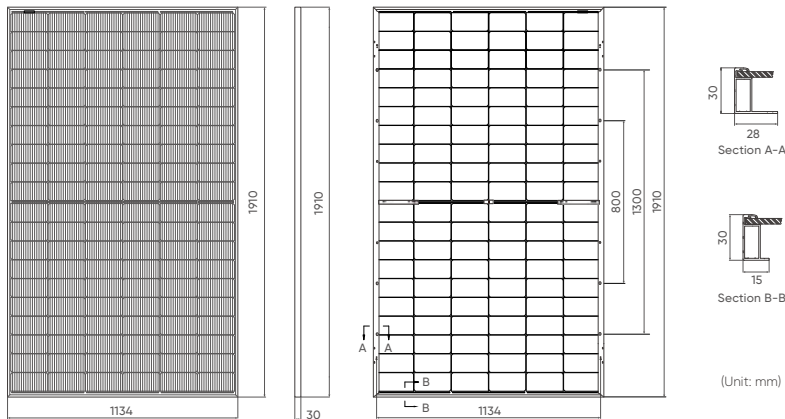

Product Image

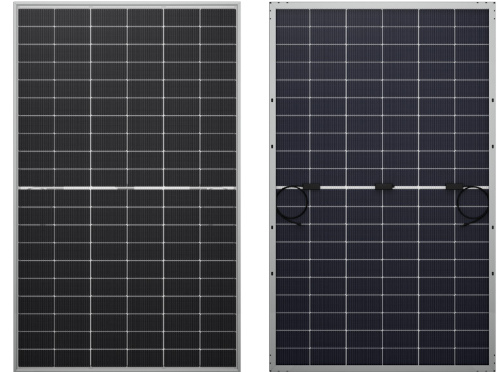

Mechanical Parameters

Solar Cells	N-type HJT
No. of Cells	120Cells (6×20)
Dimensions	1910 × 1134 × 30mm
Weight	26.0kg
Glass	Front: 2.0mm coated semi-tempered glass; Back: 2.0mm semi-tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
Output Cables	4mm ² , 300mm (+) / 300mm (-), Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa
Packaging	36pcs/box, 216pcs/20'GP, 864pcs/40'HQ

Operating Characteristics

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0/+5W

Temperature Characteristics

Nominal Operating Temperature (NMOT)	44±2°C
Temperature Coefficient of Pmax	-0.26%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	+0.04%/°C

Electrical Characteristics (STC*)

Module Type: MS-60HB	485	490	495	500	505
Maximum power (Pmax/W)	485	490	495	500	505
Open Circuit Voltage (Voc/V)	44.93	45.15	45.37	45.59	45.81
Short Circuit Current (Isc/A)	13.37	13.42	13.47	13.52	13.57
Voltage at Maximum power (Vmpp/V)	37.54	37.78	38.02	38.26	38.50
Current Maximum Power (Impp/A)	12.92	12.97	13.02	13.07	13.12
MODULE EFFICIENCY (%)	22.39	22.62	22.85	23.08	23.32

Electrical Characteristics (NMOT*)

5%	Maximum power (Pmax/W)	509	515	520	525	530
	Module Efficiency STC (%)	23.51	23.75	24.00	24.24	24.48
15%	Maximum power (Pmax/W)	558	564	569	575	581
	Module Efficiency STC (%)	25.75	26.02	26.28	26.55	26.81
25%	Maximum Power (Pmax/W)	606	613	619	625	631
	Module Efficiency STC (%)	27.99	28.28	28.57	28.86	29.14

1. Standard Test Conditions [STC]: irradiance 1000W/m²; AM 1.5; ambient temperature 25°C according to EN 60904-3;
 2. Tolerance of Pm: 0~+5W, Measuring uncertainty of power: ±3%. Performance deviation of Voc [V], Isc [A], Vm [V] and Im [A]: ±3%.

I-V CURVE

